

# 75 Material


A high permeability, low loss MnZn ferrite designed for a range of applications including broadband and pulse transformer and filtering applications.

### Specifications


Property	Unit	Symbol	Standard Test Conditions	Value
Initial Permeability		$\mu_i$	Frequency=10 kHz; B<10 gauss	5000 ± 30%
Saturation Flux Density	gauss	$B_s$	H=10 oersted	≈ 4700
Residual Flux Density	gauss	$B_r$		≈ 1200
Coercive Force	oersted	$H_c$		≈ 0.1
Loss Factor	$10^{-6}$	$\text{Tan}\delta/\mu_i$	Frequency=0.1 MHz; B=1 gauss	≤ 15
Temperature Coefficient of Initial Permeability (20-70°C)	%/°C			≤ 0.5
Volume Resistivity	$\Omega$ cm	$\rho$		≈ 200
Curie Temperature	°C	$T_c$		≥ 175

Note: values are typical and based on measurements of a standard toroid at 25 °C


**Complex Permeability vs. Frequency**

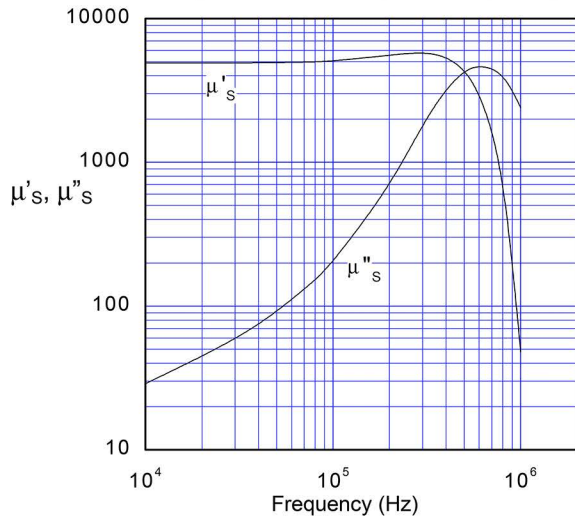

**B – H Loop**

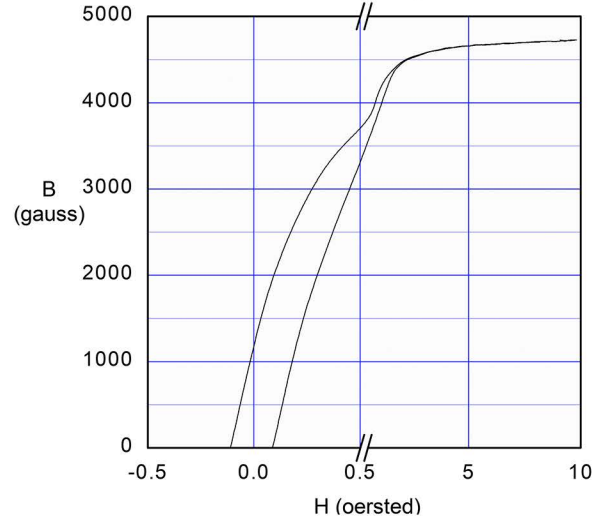

**Initial Permeability vs. Temperature**

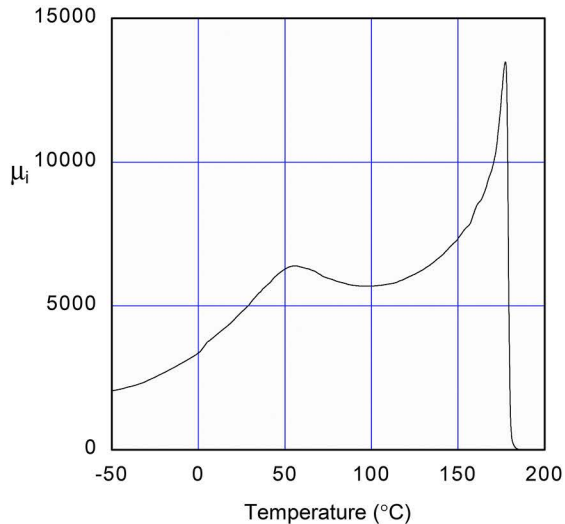

**Incremental Permeability vs. Field Strength**

